

Features

Great cost-effective for front-lit display **Black Back**



Adopts high tenacity yarn provides good tear/tensile strength

White opaque substrate for front-lit display

Matte surface available

Best suited for Indoor or outdoor front-lit display under moderate weather conditions

Applications

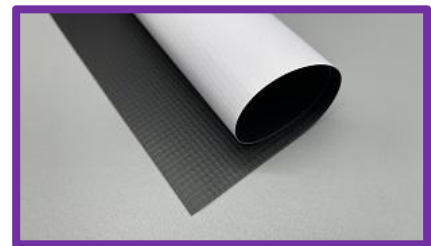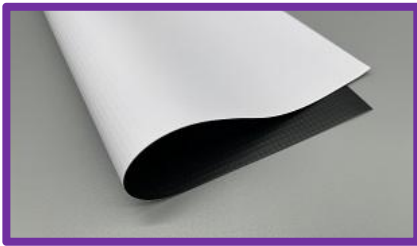

Technical Data Sheet

Item Code	FBLFFX55099440B	Test Method
Base Fabric	500D*500D 9*9	DIN EN ISO2060
Weight (GSM)	440	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	ISO527/3:1995
	Weft (N/5cm)	ISO527/3:1995
Tear Strength	Warp (N/5cm)	ISO4674/1:2003
	Weft (N/5cm)	ISO4674/1:2003
Adhesion Strength	N/A	DIN53357:1982
Temperature	-30°C/+70°C	ISO13934-1:1999
RF Weldable (Heat Sealable)	YES	DIN53354
Flame Retardant	B1/M1/M2/NFPA701	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

Ink Printability

SOLVENT

ECO-SOLVENT

UV

LATEX

SCREEN PRINTING



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat/WhatsApp: +86-158-5832-2153
<mailto:contact@hncomax.com> <https://www.hncomax.com>

